


Executant 04 pav i
Investitie 041 pav i
Obiect 2 infirm. 2025
Deviz 1 constructii interioare

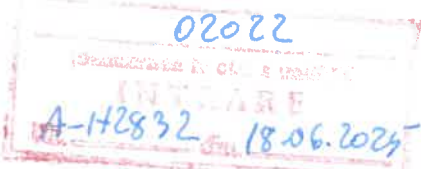

antemasuratoare

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
1	RPCJ68C1	82 MP	2,611.56000			
RECONDITIONAREA TENCUIELILOR SPECIALE LA FATADE PR IN BUCIARDAREA TENCUIELILOR IMPARTITE IN ASIZE *						
2	TSH01A1	82 SUTE MP	5.91000			
DEGAJAREA TERENULUI DE CORPURI STRAINE						
3	RPEA15J1	82 M	1,250.00000			
DEMONTARE TUB PROT IPE INST APAR INTRE 36-40 MM*						
tub protectie cabluri retea NET						
4	EA01D3	82 M	1,250.00000			
TUB IZOLANT IP-PVC MONTAT APARENT PE DIBLURI DE LE MN CU D=39MM						
5	RPCM08A1	82 MP	736.00000			
BUCIARDARE PLACAJE DIN MOZAIC *						
6	RPCT29A1	82 MP	151.60000			
DESFACEREA PLACAJELOR FAIANTA GRESIE SI CERAMICE *						
7	RPCT01B1	82 MP	125.00000			
DEMOLAREA PERETILOR DESPARTITORI DIN CARAMIDA PE M UCHIE IN SUPR.PESTE 10 MP *						
mastii tevi						
8	RPCJ51A1	82 M	150.00000			
REP.CRAP.DIN TENC.EXT.DRISCUITE CU MORTAR DE CIMEN T-VAR MARCA 50 T IN TREI STRATURI *						

A-N2832/18.06.2025/02022



Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala

9 **RPCR24A1** 82 MP **3,283.00000** -100%

VOPSITORIE CU VOPSEA PE BAZA DE ACETAT POLIVINIL P
T.INTERIOR PE TENCUIELI EXISTENTE

L:10161 -0001:6104353 -VOPSEA VINAROM ALBA V.108-210 STAS 7359-80

10 **6104665** KG **1,477.35000**

VOPSEA LAVABILA CU IONI DE ARGINT

11 **CN34A** 99 MP **1,395.00000**

TAPETE COMPUSE 1 STR.PVC COMPACT CU MODEL SI 1 STR
DE PROT.DIN PVC TRANSPARENT APL.PE PERETI GLETUITI
tarkett omogen antibacterian

L:LC30I -0082:2947741 -BAGHETA RASIN FINIS 10X5-10 MM

L:LC52H -0029:6110510 -ADEZIV PTR LIPIT P.V.C.

L:LC73B -0006:7353018 -TAPET PVC LAVABIL CU SANGRENARE CONTINUA L=530MM

12 **CG18E1** 82 MP **736.00000**

PARDOSELI DIN BETON B300 DE 10CM GROS.REZISTENT LA
SOC IN CAROURI 1M/M CU ROST.UMPL.BIT.FARA SCLIV.

L:10173 -0074:CZ0108K1 -PREPARARE BETON B300 AGREG GRELE <16MM CIMENT PA35BET CU PERMEABILITATE REDUSA INST CENTRALIZATE \$

13 **RPCD03A4** 82 KG **4,048.00000**

ARMATURI PT.BET.ARM.LA ELEMENTE DE CTII OBISNUITE
CU PLANS.DREPT DIN OTEL PC S2 DIST.MASE PLASTICE*

14 **AUT6401** 82 ORE **380.00000**

ELICOPTER M1-B

\$

15 **CG03B1** 82 MP **691.51000**

PARDOSELI DIN MATERIALE PLASTICE CU COVOR PVC PE
SUPORT TEXTIL INCAP SUPRAF >20MP CU PERVAZ PVC
tarket cu banda termosudata OmOgen antibacterian

L:10103 -0002:6719861 -COVOR PVC F.SUP.TIP A CAL1 G=2,0 LAT=1500 NEIMPR. S7361

17 **RPCK40B1** 82 MP **44.49000** -100%

PARDOSELI DIN PLACI DE GRESIE CERAMICA ICULOARE SI
FORMA IN SUPRAF >60CMP/BUC

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii	Denumire resursa			Sp.man	Pret manopera	Val. manopera
Observatii				Sp.uti	Pret utilaj	Val. utilaj
Liste anexa					Pret transport	Val. transport
					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
18	2421961	MP	45.82000			
	PLACI DE GRESIE					
	1641*1.03					
19	6111760	KG	177.96000			
	ADEZIV					
20	6102820	KG	17.79000			
	CHIT DE ETANSARE ROST ULTRACOLOR					
21	RPCJ10A1	82 MP	284.66000			
	TENC.INT.SUBTIRI LA PERETI BET.ARM.DE 1CM GROS.CU MORT.100T PT.SPRIT SI MORT.VAR CIM.10T GRU.STR.V.*					
22	RPCJ20A2	82 M	636.35000			
	REP.TENC.INT.DE 3CM EXEC.CU M.IPSOS VAR 100T PT.SM IR M50T PT.GR.M10T PT.STR.VIZ.LA PERETI *					
23	RPCE14A1	82 MP	196.09000		-100%	
	STRAT DE PROT A HIDROIZ DE 10MM GR EXEC CU MORTAR DE CIM SI SUSPENSIE DE BIT LA REP TERASE,BALCOANE					
24	9000207	KG	784.36000			
	MORTAR IMPERMEABILIZARE					
25	CI06E1	82 MP	151.60000		-100%	
	PLACAJ FAIANTA CU PLACI ALBE CALIT.1 FIXATE CU PAS TA ADEZIVA PE BAZA DE ARACET					
26	9000106	MP	156.15000			
	FAIANTA CAL. I					
	388.56mp*1.03					

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat Sp.man Sp.uti	Pret materiale Pret manopera Pret utilaj Pret transport Nr.ore/UM Greutate/UM	Val. materiale Val. manopera Val. utilaj Val. transport TOTAL A Greutate totala
27	6111760	KG	606.40000			
	ADEZIV					
28	8000166	KG	60.64000			
	CHIT DE ETANSARE					
29	RPCJ36A1	82 MP	2,395.00000			
	GLET DE IPSOS PE TENC.INT.DRIS.DE 3 MM.GROSIME EXE CUTAT CU PASTA IPSOS LA PERETI SI STILPI.					
30	9000115	M	4,726.00000			
	COLTARE AL PT PROTECTIA MUCHIILOR					
31	RPCJ36B1	82 MP	691.50000			
	GLET DE IPSOS PE TENC.INT.DRIS.DE 3 MM.GROSIME EXE CUTAT CU PASTA IPSOS LA TAVANE					
32	RPCL16A1	82 M	56.20000		-100%	
	REPARAREA TREPTELOR DE BETON MOZAICATE CU MOZAIC D IN PIATRA CU STRATUL DE UZURA DE 10 MM					
33	8000890	M	56.20000			
	CONF.METAL.PT.PROTECTIA MUCHIILOR STILP.ZIDURILOR ...*)					
34	RPCL15B1	82 M	56.20000			
	REPARARE TREPTE DIN BETON SCLIVISIT SAU ROLAT					
35	CF03C1	82 MP	691.50000			
	TENCUIELI INTERIOARE DRISCUITE,LA TAVANE PLANE,IN GROSIME MEDIE DE 1CM					
L:10174 -0019:CZ0203E1 -PREPARARE MORTAR CIM -VAR PT ZID M50-Z CU CIM F25 MANUAL CU VAR PASTA						\$

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
36	CK20C1	82 MP	658.51000	-100%		
TAVANE SUSPENDATE DIN PFL SAU PAL,MELAMINAT SAU EM AILAT CU BAGHETE DIN LEMN LA ROSTURI						
37	9000119	MP	678.26000			
TAVAN FALS CASETAT CU SIST DE PRINDERE						
38	RPC052C1	82 MP	50.65000	-100%		
REPARARE LAMBRIURI IN TABLII PRIN INLOC.TABLIEI DI N PFL MELAMINAT *						
39	900016	MP	50.65000			
LAMBRIU TRATAT CU SOL IGNIFUGA + SISTEM DE PRINDER E						
40	RPCR44B1	82 MP	9.00000			
VOPSITUL CU EMAIL ALCHID,PE TIMPL.METALICA 2STRAT* balustrade + balustrade ferestre capat hol						
41	RPCE19C1	82 M	50.00000	-100%		
ETANS.ROST.DE DILAT.LA TERASE PLANS.PERETI SI SCHE LET BET.ARM.CU PL.SEMIRIGID.DE VATA LIP.MAST.BIT.*						
42	6718180	M	53.00000			
PROFIL PVC TIP M 35 PT.ETANS.ROST.CONSTR.HIDRO. S 9076						
43	CD09A1	82 MP	84.00000	-100%		
PERETI DESPARTITORI DIN PLACI DE IPSOS masca tevi						
44	9000303	MP	84.00000			
PLACARI RIGIPS INCL. SIST. DE PRINDERE SI IZOLATIA						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala

45 RPCK09D 99 M 100.00000 -100%

MONTAREA PERVAZURILOR SI PLINTELOR DE MAX 15 CM LA
TIME -PLINTE ORIZONTALE LA PERETI

L:LC61C -0059:2948221 -PLINTE PT.PARCHET DIN FAG

46 8000875 M 103.00000

BALUSTRADA DIN LEMN (INCL. MINA CURENTA)GATA CONF
...*)
la pereti holuri

47 CK06D1 82 MP 60.00000 -100%

GLASVANDURI FIXATE PE GHERMELE EXISTENTE DIN FOI D
E USA

48 800076F MP 60.00000

GLASVANDURI DIN PROFILURI DIN MASE PLASTICE ...*)

49 CB16A 99 MP 3,283.00000

SCHELA PT LUCRARI DE FINISAJE IN INCAPERI PANA LA
5 M INALTIME

L:LC03A -0027:2904119 -DULAPURI DE RASIN.CA.A GR.28-58MM.L=4-6M STAS 942-80
L:LC04C -0091:2901166 -LEMN ROTUND RAS.(BILE MANELE)D=12-15 CM L=3,00-6,00 M
L:LC05B -0011:5886899 -CUIE CU CAP CONIC TIP A1 2,8 X 50 OL34 S 2111

50 AUT1303 82 ORE 1.00000

ORA PR SCHELA MET TUB.EXT.S640MP G=11-13,5 3SCH.LE
I/MP \$

51 TRA01A15 82 TONE 321.26000

TRANSPORTUL RUTIER AL MATERIALELOR,SEMIFABRICATELO
R CU AUTOBASculANTA PE DIST.= 15 KM. \$

52 TRA01A15P 82 TONE 290.00000

TRANSPORTUL RUTIER AL PAMINTULUI SAU MOLOZULUI CU
AUTOBASculANTA DIST.=15 KM \$

Greutate totala
Total ore

Total materiale
Total manopera
Total utilaj
Total transport
Total A

Intocmit
Pec
Lecute
10.11.2025

VERIFICAT TEHNIC	
Pec	_____
sing. Dagla Costel	
DATA	_____

Verificat
DIRECTOR GENERAL ADMINISTRATIV
Cdr
Rodu PODOBEL
Data listarii: 6/17/2025 Pag. 6