
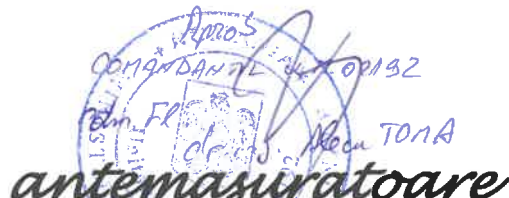


Executant 04 pav i
 Investitie 041 pav i
 Obiect 2 infirm. 2025
 Deviz 2 constructii ext.

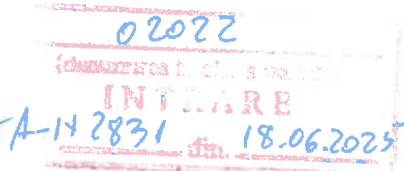

1/8.

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
	Corectii			Sp.man	Pret manopera	Val. manopera
	Denumire resursa			Sp.uti	Pret utilaj	Val. utilaj
	Observatii				Pret transport	Val. transport
	Liste anexa				Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
1	RPCT41A1	82 MP	493.00000			
DESFACEREA IZOLATIEI HIDROFUGE VECHI IN VEDEREA RE FACERII *						
A-N2831/18.06.2025/02022						
2	RPCT14A1	82 MP	114.00000			
DESFACEREA TENC LA FATADE EXEC CU TERASIT DOLOMIT SAU SIMILARE *						
3	RPCJ50B1	82 MP	114.00000			
REP.TENC.EXT.DRIS.PE ZID.CARAM.SAU BET.DE 2,5 CM G ROS.EXEC.IN FISII PINA LA 70 CM LATIME *						
4	RPCE13C1	82 MP	368.00000			
STRAT DE EGALIZ.PT.HIDROIZ.LA REP.TERASE SAU BALC. CU BET.ARM.B100 GR.4-5CM.INCL.ARM.DE OTEL D=6MM * plasa sudata 6mm						
5	RPCE01A1	82 MP	493.00000			
AMORSAREA SUP.PT.APLIC.IZOL.CU 2 STRAT.SOLUT.BITU. LA REP.TERASE SAU BALC.ORIZ.SAU INCLIN.< 20GRADE *						
6	IZF04L1	82 MP	445.00000	-100%		
STRAT HIDROIZ CU HIDROBIT INTR-UN STRAT PE SUPRAF ORIZONT SAU INCL PINA LA 40U LA TERASE						
7	9000097	M	490.00000			
MEMBRANA BIT. PLAST PE SUP. PIESTER FARA ARDEZIE						
8	6201058	KG	89.00000			
GAZE LICHEFIATE PETROLIERE S 66						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
9	IZF04M1	82 MP	48.00000 -100%			
STRAT HIDROIZOL CU HIDROBIT INTR-UN STRAT PE SUPRA VERTICALE SAU INCLINATE PESTE 40U LA TERASE						
10	9000097	M	52.80000			
MEMBRANA BIT. PLAST PE SUP. PIESTER FARA ARDEZIE						
11	6201058	KG	9.60000			
GAZE LICHEFIATE PETROLIERE S 66						
12	IZF04L1	82 MP	445.00000 -100%			
STRAT HIDROIZ CU HIDROBIT INTR-UN STRAT PE SUPRAF ORIZONT SAU INCL PINA LA 40U LA TERASE						
13	9000096	MP	490.00000			
MEMBRANA CU ARDEZIE DE 5						
14	6201058	KG	89.00000			
GAZE LICHEFIATE PETROLIERE S 66						
15	IZF04M1	82 MP	48.00000 -100%			
STRAT HIDROIZOL CU HIDROBIT INTR-UN STRAT PE SUPRA VERTICALE SAU INCLINATE PESTE 40U LA TERASE						
16	9000096	MP	52.00000			
MEMBRANA CU ARDEZIE DE 5						
17	6201058	KG	9.60000			
GAZE LICHEFIATE PETROLIERE S 66						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
18	6555776	M	95.46000			
BANDA ALUMINIZATA						
19	RPSB56A1	82 BUCATA	4.00000			
INLOC.GURA SCURG.FONTA EMAIL.EVAC.APA TERASA SI AC OPERISURI CU D 100MM						
20	RPCE29B1	82 BUCATA	4.00000			
IZOLAREA GURILOR DE SCURG.INT.SI EXT.LA REP. BALC.EXEC.CU TB.PB.PINZ.P50 3STR.BIT.PT.HIDROIZ.* guri de aerisire						
21	RPCI33B1	82 M	95.46000			
GLAF.SI COPERT.DIN TB.ZN.MONT.PE UN STRAT DE CART. BITUMAT DIN TB.ZN.DE 0,5 GROS.CU LAT.DESF.30-50 *						
22	RPSB48D1	82 M	160.00000			
DEMONTARE TEVI PLUMB SCURGERE 105X2,5 MM*						
23	IZF06XC	93 BUCATA	4.00000			
PIESE AFERENTE LUCR.DE IZOL.PARAFRUNZARE (CACIULI DE PROTECTIE LA GURILE DE SCURGERE)						
24	SB16E1	82 M	160.00000			
TEAVA PVC-U NEPLASTIF.PT.CANALIZARE,MONT.APARENT I N NISA,INGROP.PAMINT,SUSPEND.PLANSEU,CU D=110 MM						
25	RPCH33C1	82 MP	1.00000	-100%		
CHEPENG DIN LEMN DE RASIN.LA POD DE 0,80X0,80 PINA LA 1X1 DIN SC.FALT.SI GEL.INCL.CAPT.SI PERV.SC.*						
26	9000430	MP	1.00000			
CHEPENG PVC						

Pbzitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
27	ACA17C1	82 BUCATA	80.00000			
PIESA LEGATURA DIN POLIESTERI ARMATE CU FIBRE STIC LA AVIND GREUTATEA PE BUCATA > 20 LA INC. 50 KG coturi, mufe, coliere sustinere tevi L:11707 -0339:6707533 -COT CU MUFA TUB CENTR.90 GRD.G R.CH.SPOR 1200 N7092 L:11708 -0001:6705808 -TEU CAPETE PREL.PT.BANDAJARE G R.CH. STD 200 200 N7092 L:11709 -0041:6706280 -TRONSON INTERV.CU CEP+MUFA G R.CH. STD 200 N7092						
28	RPCJ68C1	82 MP	420.00000			
RECONDITIONAREA TENCUIELILOR SPECIALE LA FATADE PR IN BUCIARDAREA TENCUIELILOR IMPARTITE IN ASIZE *						
29	RPCJ74A1	82 MP	60.00000			
TENCUIELI EXT.ANTICONDENS EXECUTATE CU PERLIT L:10109 -0002:2101274 -MORTAR SPECIAL TERASIT CIM+MOZ MARM.ALB GRIS L:10164 -0003:6104690 -VOPSEA EFECT DECORATIV SR.8203-5B NTR 4741-71 L:11232 -0012:2602890 -PLACA POLISTIREN EXPANDAT PEX C 4000X500X 72MM S7461						
30	RPCJ49B1	82 MP	420.00000			
TENC.EXT.DRIS.PE ZID.CARAM.SAU BET.DE 2,5 CM GROS. EXEC.IN FISII PINA LA 70 CM LATIME *						
31	RPCJ11B1	82 MP	68.00000			
REP.TENC.SUBT.LA PERETI BET.ARM.1CM GROS.CU MORT.V AR CIM 25-T PT.SPRIT SI STRAT VIZIBIL *						
32	RPCJ51A1	82 M	25.00000			
REP.CRAP.DIN TENC.EXT.DRISCUITE CU MORTAR DE CIMEN T-VAR MARCA 50 T IN TREI STRATURI *						
33	RPCC05A1	82 MP	70.40000			
COFR.DIN SCIND.RASIN.INCL.SUST.< 6M H LA CONST.DE TIP SPECIAL PT CADRE PLANSEE CASETE SUP.POLIG.*						
34	RPCB05A1	82 M CUB	7.04000			
BETON SIMPLU B 75 TURNAT IN COFRAJE *						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii	Denumire resursa			Sp.man	Pret manopera	Val. manopera
Observatii				Sp.uti	Pret utilaj	Val. utilaj
Liste anexa					Pret transport	Val. transport
					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
35	RPCT33A1	82 MP	184.00000			
DEMONTAREA USILOR SI FERESTRELOR DIN LEMN *						
36	CK11G1	82 MP	103.00000	-100%		
FERESTRE DIN ALUMINIU LA CONSTRUCTII CU H<10M CU SUPRAFATA TOCULUI < 3MP						
37	6720372	MP	103.00000			
FERESTRE OSCILO-BAT DESCH INT PIMAPEN SERIA 6000 P VC 3C						
38	82	MP	143.00000			
PLASE INSECTE RAMA METALICA (ARMONICA)						
39	CK14I1	82 MP	81.00000	-100%		
USI DIN ALUMINIU LA CONSTRUCTII CU H<10M CU SUPRAFATA TOCULUI < 5 MP						
40	6308029	MP	62.00000			
USI DIN AL.TIP ROYAL S-SCHUCO MONTATE IN RAME						
41	9000110	MP	10.00000			
USI INTERIOARE PVC PLINE CU PRAG						
42	9000109	MP	9.00000			
USI PVC EXTERIOARE CU GEAM SI PRAG						
43	CK09A1	82 M	176.08000	-100%		
- GLAFURI DIN CHERESTEA DE RASINOASE						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat Sp.man Sp.uti	Pret materiale Pret manopera Pret utilaj Pret transport Nr.ore/UM Greutate/UM	Val. materiale Val. manopera Val. utilaj Val. transport TOTAL A Greutate totala
44	9260091	M	88.04000			
GLAFURI PVC INTERIOR INCL. SIST. DE PRINDERE						
45	9000133	M	88.04000			
GLAF AL EXT. 40CM						
46	RPCJ13B1	82 M	739.00000			
REP.TENC.INT.IN JURUL TOC.SI PERV.CU MORT.VAR CIM. MARCA 10-T CU SPALETII:DREPTI INTRE 15-25CM LAT *						
47	CF22A1	82 MP	494.00000	-100%		
FINIS.EXT.STROP 3MM EXEC.PE ELEM B.A.PREF.CIMENT A LB,PRAF PIATRA SI ARACET						
48	9000126	LITRU	98.80000			
AMORSA FIXARE TENCUIALA						
49	9000139	KG	1,729.00000			
TENCUIALA DECORATIVA						
50	RPCR02B	91 MP	837.00000			
ZUGRAVELI EXTERIOARE SUPERIOARE,VOPSITORII LAVABIL EXTERIOARE SI INT. EXEC. MANUAL CU VINAROM 2-STRAT 687pereti ext. +150 glaf ferestre si usi ext. L:10161 -0004:6104585 -VOPSEA VINAROM CREM DESCHIS V.718-220 STAS 7359-80						
51	RPCL15A1	82 M	16.00000			
REPARARE TREPTE DIN BETON EXEC.BRUT PT.A FI PLAC.						
52	RPCK40B1	82 MP	7.40000	-100%		
PARDOSELI DIN PLACI DE GRESIE CERAMICA ICULOARE SI FORMA IN SUPRAF >60CMP/BUC						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala
53	2426026	MP	7.62000			
PLACI GRESIE NETEDE GRI F C1 200X200X20 V RAC						
54	6102820	KG	3.00000			
CHIT DE ETANSARE ROST ULTRACOLOR						
55	6111760	KG	30.00000			
ADEZIV						
56	8000890	M	16.00000			
CONF.METAL.PT.PROTECTIA MUCHIILOR STILP.ZIDURILOR ...*)						
57	RPCS01B1	82 MP	153.00000			
TROTUARE DIN DALE DE BETON B150 FARA SCLIVISEALA 1 00X100X10 CU ROSTURILE UMPLUTE CU NISIP se aplica plasa 6 mm						
58	RPCH10A	91 MP	687.00000			
MONTAT SI DEMONTAT SCHELA METALICA TUBULARA PT.LUC INT.EXT.INCL.MAT.NECESARE EXEC.PLATF.LEMN,STRESINI						
59	AUT1303	82 ORE	2,160.00000			
ORA PR SCHELA MET TUB.EXT.S640MP G=11-13,5 3SCH.LE I/MP \$						
60	TRB05A25	82 TONE	80.00000			
TRANSPORTUL MATERIALELOR PRIN PURTAT DIRECT.MATERI ALE INCOMODE SUB 25 KG DISTANTA 50M \$						
61	TRA01A15	82 TONE	203.50000			
TRANSPORTUL RUTIER AL MATERIALELOR,SEMIFABRICATELO R CU AUTOBASCULANTA PE DIST.= 15 KM. \$						

Pozitie	Cod resursa	U/M	Cantitate	Sp.mat	Pret materiale	Val. materiale
Corectii				Sp.man	Pret manopera	Val. manopera
Denumire resursa				Sp.uti	Pret utilaj	Val. utilaj
Observatii					Pret transport	Val. transport
Liste anexa					Nr.ore/UM	TOTAL A
					Greutate/UM	Greutate totala

62 TRA01A15P 82 TONE 203.50000

TRANSPORTUL RUTIER AL PAMINTULUI SAU MOLOZULUI CU
AUTOBASCULANTA DIST.=15 KM \$

Greutate totala
Total ore

Total materiale
Total manopera
Total utilaj
Total transport
Total A

In toamida,
pe *Janita*
Lenuta Janita

Verificat,
DIRECTOR GENERAL ADMINISTRATIV
Color
Radu BOADOL

